


PM_{SERIES}

W6-658I

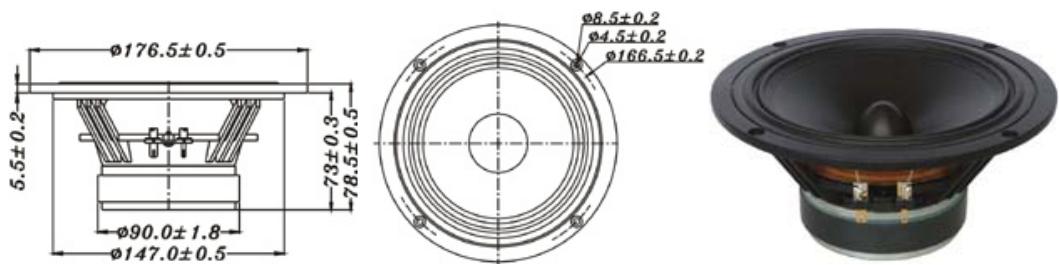

6.5" PPM WOOFER

- EXTREMELY LINEAR EXCURSION DESIGN
- PPM CONE WITH TWIN ROLL SHAPE RUBBER SURROUND
- DIE CAST BASKET, PPM PHASE PLUG ENCLOSURES
- VENTED POLE PIECE
- CCAW WITH KAPTON BOBBIN/CONEX SPIDER



VOICE:886.2.26570282 FAX:886.2.26580166
E-MAIL :info@tb-speaker.com

DIAPHRAGM MTL	PPM
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6 Ω
SENSITIVITY 1W/1m	89 dB
FREQUENCY RESPONSE	45-10K Hz
FREE AIR RESONANCE	45 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	6.32 TM
MAGNET WEIGHT (16oz)	451 g
MOVING MASS	10.98 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1017 uMN ⁻¹
EFFEC.PISTON AREA	0.014 M ²
Levc	0.118 mH
Zo	58 ohm
X-max	4.10 mm
Vas	28.31 Litr.
Qts	0.44
Qms	4.49
Qes	0.49

CLOSE